

UTILITY 45


The Utility-45 is a heavy-duty work light upgraded in 2018 to deliver even more visibility, with greater intensity and improved spread of light, facilitating safer and more productive work environments. The 50 lux line, defined by HSE as the effective level of illumination when working outdoors at night, is achieved at 16m distance, with a spread of 10m (mounted at 3m with 20 degree down angle). Combined with design features for maximising functionality and reliability, this is a product that can be relied on to deliver exceptional performance, time after time, whatever the application.



SEE MORE. **WORK SAFER.**

UTILITY 45

- High density LED's
- Vacuum-metallised optics deliver wide spread of light
- Versatile mounting bracket
- EMC protected
- Electronic thermal management
- ADR (ECE/TRANS/242) compliant version available
- Supplied with slim-line or wide mount
- CAE optimised 'Matrix' cooling system
- Designed & manufactured in the UK

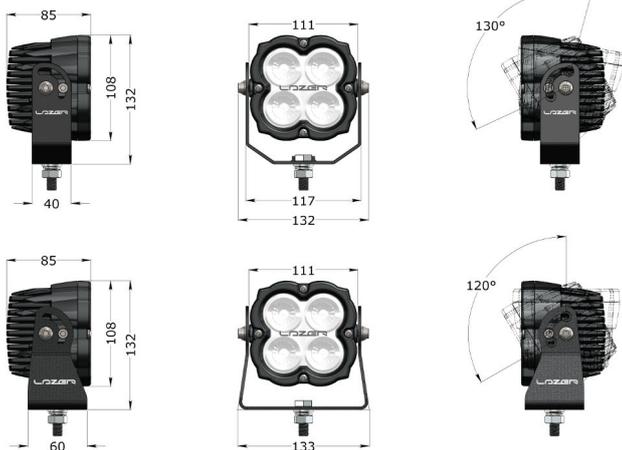

TECHNICAL SPECIFICATIONS

* LED MANUFACTURERS SPECIFICATIONS | † AT 14.4 VOLTS

E11 APPROVED WORKLIGHT	WORK LAMP	ECE R10
	VOLTAGE RANGE	9V - 32V
UP TO 5 YEAR WARRANTY	RAW LUMENS	4560
	BEAM PATTERN	Wide
 IP69K WATERPROOF	BEAM DISTANCE (50LX)	16m
	# HIGH POWER LEDS	4
CISPR 25 CLASS 3	POWER CONSUMPTION	45 Watts
	CURRENT DRAW†	3.1 Amps
	LED LIFE	50,000 Hrs*
	WEIGHT	1260g
	SALT SPRAY TEST	ISO 9227 (1000H)
	OPERATING TEMPERATURE	-40oC...+90oC
	VIBRATION; RANDOM SWEEP (BS EN 60068-2-64)	10HZ > 1000HZ, 0.14>20 (M/S²)/HZ

