


LINEAR-18 ELITE



Measuring just 40mm in height, the Linear range represents the very best in slimline auxiliary high beam driving lights. By utilising a combination of highly efficient 3W LEDs and vacuum-metallised wide optics, to deliver a perfectly tuned beam pattern for everyday road use, the 18 Elite boasts 13,500 raw lumens, with 1 lux reaching just over 500m with a 64 degrees spread of light. Dual-output functionality allows for the UNECE reference number to be reduced, in markets requiring a low E-mark reference number, made possible through addition of the Linear E-Mark Cap (sold separately).



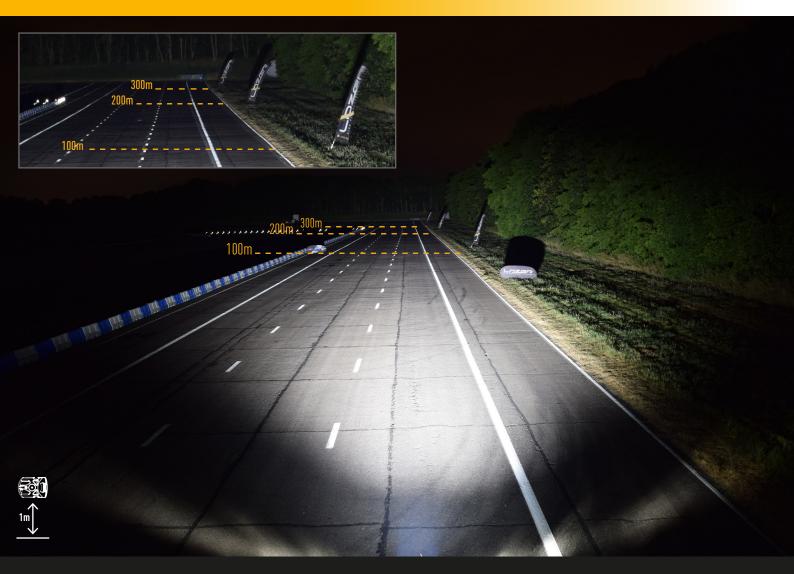



LINEAR-18 ELITE

- Combination of highly efficient 3W 'premium bin' LEDs
- Vacuum-metallised optics deliver wide spread of light
- Flexible mounting options Anti-heft mounting brackets included
- Lower E-Mark avaliable via a E-Mark cap
- Sleek, low profile design facilitates installation
- Electronic thermal management
- Designed & manufactured in the UK


MOUNTING OPTIONS









(Centre Mount kit sold seperately)









LAZER LAMPS LTD, Units 1+2, Harlow Mill Business Centre, Riverway, Harlow, Essex. CM20 2FD. UK +44(0)1992 677374 | sales@lazerlamps.com | www.lazerlamps.com

E-MARK REF (W/O EMARK CAP WITH EMARK CAP)	2x25 2x10
VOLTAGE RANGE	10V - 32V
RAW LUMENS (W/O EMARK CAP WITH EMARK CAP)	13,500 5,225
BEAM PATTERN	Wide
BEAM DISTANCE (0.25LX) (W/O EMARK CAP WITH EMARK CAP)	1023m 647m
# HIGH POWER LEDS	36
POWER CONSUMPTION (W/O EMARK CAP WITH EMARK CAP)	130W 25W
CURRENT DRAW [†] (W/O EMARK CAP WITH EMARK CAP)	9A 1.8A
LED LIFE	50,000 Hrs*
WEIGHT	1090g







* LED Manufacturers Specifications

†At 14.4 Volts

Horizontal: 64° / Vertical: 15° (2% of peak)

