

LAZER

H I G H P E R F O R M A N C E L I G H T I N G



FORD TRANSIT CUSTOM (2018+) **TRIPLE-R 1250 SMARTVIEW INSTALL**

FITTING INSTRUCTIONS

ANLEITUNG

INSTRUCTIONS

INSTRUCCIONES

TECHNICAL SUPPORT

aaron@lazerlamps.com / sales@lazerlamps.com
+44 (0)1992 945601 / +44 (0)1992 677374

WHAT'S REQUIRED

- FORD TRANSIT CUSTOM 2018+ MOUNTING KIT
- TRIPLE-R 1250 SMARTVIEW (HARNESS AND CENTRE MOUNTS INCLUDED)
- DASHBOARD CONTROLLER
- CANM8 CANDUO

DIFFICULTY LEVEL



TOOLS REQUIRED



DRILL BIT
5MM



METRIC
SOCKET SET



WIRE STRIPPERS
AND RATCHET CRIMPERS




WIRE CUTTERS



RIVET GUN




ALLEN KEY
SIZE: 5

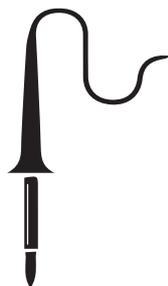

SOLDERING
IRON



T25 / T30 TORX
SCREWDRIVERS



PLASTIC
TRIM TOOLS



ANGLE
GRINDER

PRE-INSTALLATION CHECKS

1. Ensure battery is disconnected.

BUMPER REMOVAL



STEP 1

Remove the x2 T30 screws on each headlight.




STEP 2

Unplug the headlights on both sides.



STEP 3

Lift out both headlights.

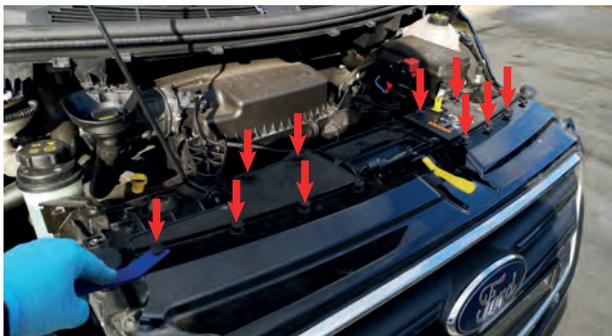

STEP 4

Remove x12 plastic push rivets.



STEP 5

Remove number plate.



STEP 6

Remove the x2 13mm bolts behind number plate.



STEP 7

Remove x4 T30 screws from under bumper.




STEP 8

Remove the x2 T25 screws on the inside of both wheel arches.



STEP 9

Unplug bumper loom connector located behind washer reservoir.

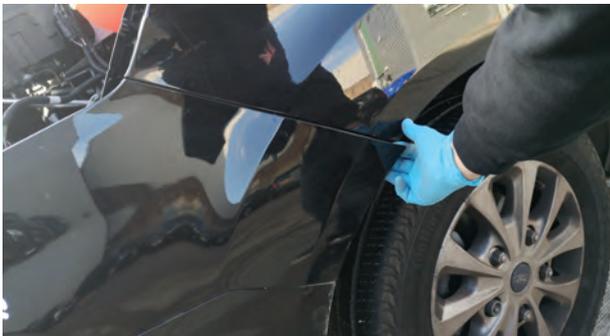

STEP 10

Gently pull both corners of the bumper out.



STEP 11

Unclip retaining clip on both sides under headlight.



STEP 12



Pull top centre of bumper up and unclip the retaining clips on both sides of the vehicle.

MOUNTING YOUR TRIPLE-R SMARTVIEW



STEP 1

Remove part of the radiator support bar as shown as you will need this space for the light to fit in place.



STEP 2




Fix each Centre Mount to the Bumper Beam brackets as shown using the supplied: bolt, 3x nuts, spring and penny washer (centrally on the middle mounting slot).



STEP 3



The rotating feature will need to be removed and turned round so that the M5 grub screws are showing at the front of the mount instead of behind.

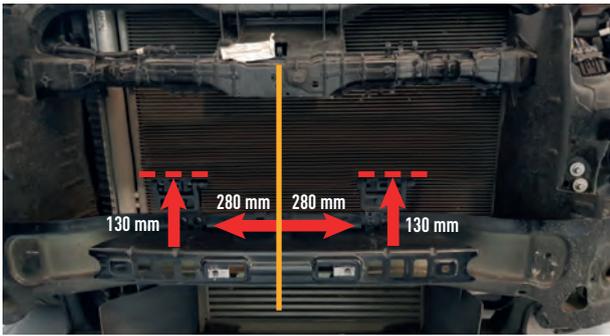

STEP 4

Mark where you will mount the Bumper Beam Brackets to the bumper beam as per the measurements shown.



STEP 5

Drill the 5mm pilot holes for the rivets for the Bumper Beam Brackets (2 rivets per bumper beam bracket).



STEP 6

Using a rivet gun, rivet the Bumper Beam Brackets into place.




STEP 7

The Triple-R 1250 Smartivew can now slide onto the Centre Mounts, once in place, tighten the M5 grub screws on the Centre Mounts.



STEP 8

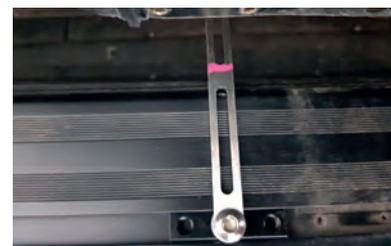


Assemble Stay bar and place in lamp channel to mark where you will bend the Stay Bar in order to mount it to a secure surface.



STEP 9


Bend the Stay Bar where you have marked and secure to the vehicle using a self tapping screw and to the lamp using the M5 grub screws included in the kit.

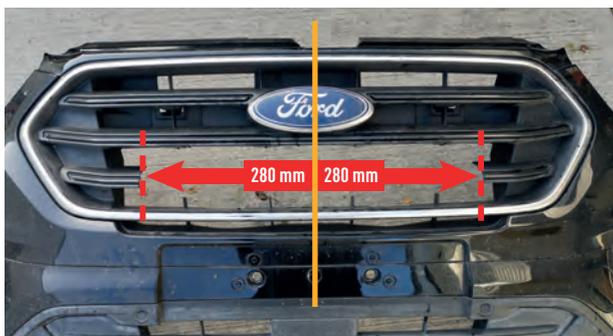

STEP 10

Prepare the grille ready to be re-fitted to the vehicle.

Cut the main grille underneath the ford badge as per the measurements shown.

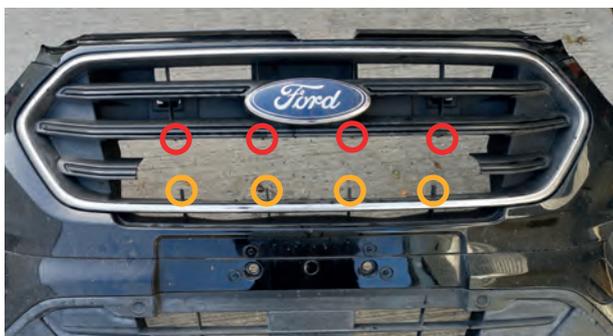

STEP 10.1

Cut the upper vias flush highlighted in red and the lower vias to 20mm height which is highlighted in yellow.

WIRING



STEP 1

Live (red wire) should be taken from the 10mm stud next to engine fusebox.



STEP 2

Ground should be taken from 10mm bolt in front of the engine fusebox.



STEP 3

Cable entry for the vehicle is located on the far right of the bulkhead.

You will need to feed the live and earth cable as well as the lamp cables through here.



STEP 4

Remove the right hand cupholder.




STEP 5

Undo the x2 T25 torx screws below the cup holder.



STEP 6

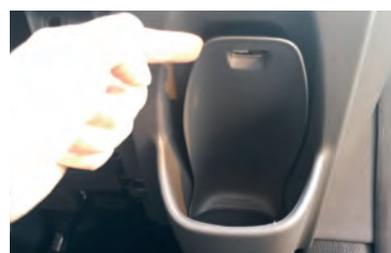

Remove the lower cover and unscrew the T25 torx behind.




STEP 7

Remove the panel beneath the steering wheel.

**STEP 8**

Pull the trim forward and unplug the light switch, then completely remove panel. Remove light switch and plug back in to stop noise.

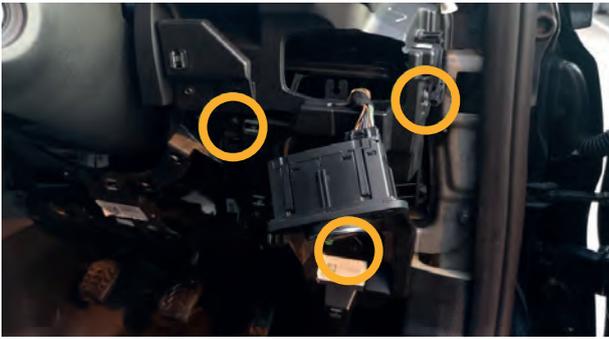**STEP 9**


Unscrew the 3x T25 screws holding in the right hand panel and remove to reveal the interior fusebox.

**STEP 10**

Live, earth and Smartview lamp wires can be brought through to fusebox area.

**STEP 11**

Ignition feed for ATU can be taken from the yellow/grey wire in the black plug by the door.

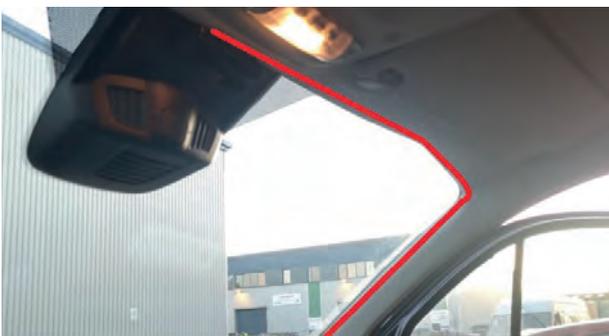**STEP 12**

Plug in the ATU as per wiring diagram included with Triple-R Smartview Quick-start guide.

Run the cable for the Dashboard Controller (recommended location shown).



STEP 13

Red wire in the black plug by the door is 12V live for CanM8 T30 bolt below can be used as ground/earth for CanM8.



STEP 14

Locate the OBD plug on the right hand side, undo the 2x 8mm nuts to get access for the canbus wiring to install the CanM8.

CAN-M8 DUO INTERFACE INFORMATION



RED > 12V LIVE RED WIRE
BLACK > GROUND/EARTH T30 BOLT
WHITE > OBD PIN 3 (GREY/ORANGE)
BLUE > OBD PIN 11 (PURPLE/ORANGE)

INSTALLATION CHECKS

1. Ensure battery is re-connected properly.
2. Test light bar is working fully before re-assembling vehicle.

LAZER
 HIGH PERFORMANCE LIGHTING

Thank you for choosing a Lazer Lamps product.
 Vielen Dank dafür, dass Sie sich für ein Produkt von Lazer Lamps entschieden haben.
 Merci pour choisir un produit de Lazer Lamps.
 Gracias por la seleccion de productos de Lazer Lamps.