

LAZER

H I G H P E R F O R M A N C E L I G H T I N G



UNIVERSAL BUMPER BEAM MOUNTING KIT

FITTING INSTRUCTIONS

ANLEITUNG

INSTRUCTIONS

INSTRUCCIONES

TECHNICAL SUPPORT

aaron@lazerlamps.com / sales@lazerlamps.com
+44 (0)1992 945601 / +44 (0)1992 677374

WHAT'S REQUIRED

- 1x Lazer High Performance LED Light
- 1x Single-Lamp Harness Kit
- 1x Bumper Beam Mounting Kit (BBB-01K)
- Optional: 1x Lazer CAN interface (if your vehicle has LED headlights and you are unable to find a 12V signal from the highbeam headlight trigger).

DIFFICULTY LEVEL




TOOLS REQUIRED



**METRIC
SOCKET SET**



**WIRE STRIPPERS
AND RATCHET CRIMPERS**

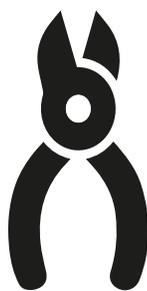


WIRE CUTTERS



**TORX
SCREWDRIVER**



**PLASTIC
TRIM TOOLS**

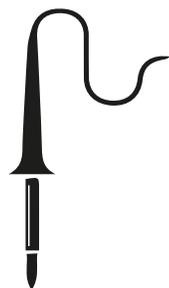

**SOLDERING
IRON**

(FOR CAN INTERFACE INSTALLATION)

STEP 1 - PRE-INSTALLATION CHECKS

Ensure battery is disconnected.

STEP 2 - BUMPER REMOVAL

For vehicle specific instructions on how to remove the front bumper, please see vehicle manufacturer manual.


STEP 3 - FITTING YOUR LAMP

Using the included bolts, nuts and washers, secure the brackets and lamp to the crash bar of the vehicle, lining the centre of the lamp with the centre of the vehicle.



STEP 4 - WIRING UP YOUR LAMP

Connect the Lazer wiring harness as shown below and mount the relay close to the battery:
Test for a 12V signal at the back of the high beam headlight plug to identify if you will require a CAN Interface or not.

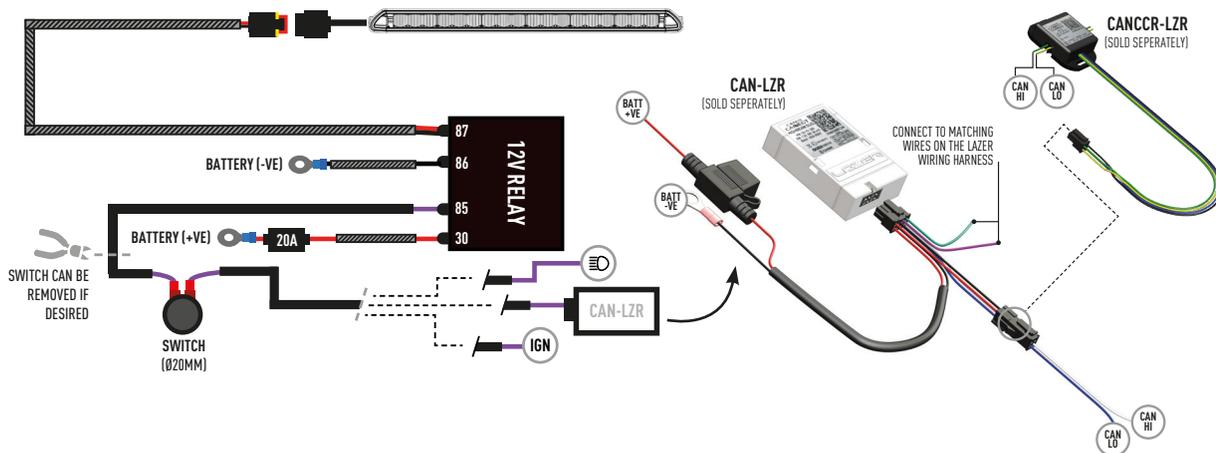

STEP 5 - TEST LIGHT

Ensure the light bar is working correctly before re-assembling vehicle and re-connecting the battery.



LAZER
HIGH PERFORMANCE LIGHTING

WWW.LAZERLAMPS.COM

+44 (0)1992 677374
sales@lazerlamps.com

Lazer Lamps Ltd, Units 1&2 Harlow Mill Business Centre,
Riverway, Harlow, Essex. CM20 2FD. United Kingdom



MADE IN THE UK



/LAZERLAMPS



/LAZERLAMPS